




10/532383
PCT/GB 2003/00489



INVESTOR IN PEOPLE



The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 13 November 2003

BEST AVAILABLE COPY

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Patents Form 1/77

Patents Act 1977
(Rule 16)The
Patent
OfficeTHE PATENT OFFICE
A

- 1 NOV 2002

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

RECEIVED BY FAX

01NOV02 E760434-1 002973
P01/7700 0.00-0225496.9

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference

NPS/P071984GB

2. Patent application number

(The Patent Office will fill in this part)

0225496.9

1 NOV 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames)

The Engineering Business Limited
Broomhaugh House
Riding Mill
Northumberland
NE44 6EG

Patents ADP number (if you know it)

7394240001

If the applicant is a corporate body, give the country/state of its incorporation

GB

4. Title of the invention

Longitudinal Load Varying Device for Elongate Members

5. Name of your agent (if you have one)

Harrison Goddard Foote

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Belgrave Hall
Belgrave Street
Leeds
LS2 8DD

Patents ADP number (if you know it)

14574001 7631310002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
 b) there is an inventor who is not named as an applicant, or
 c) any named applicant is a corporate body.
 See note (d)


Yes

Patents Form 1/77

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	8	/
Claim(s)	3	/
Abstract	1	/
Drawing(s)	4	/ 

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1 /

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

Fee Sheet /

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

1 November 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

Nigel Sanderson

0113 233 0100

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

DUPLICATE

Longitudinal Load Varying Device for Elongate Members

5 The present invention relates to apparatus for gripping an elongate member and applying a continuous longitudinal load to the member while allowing the member to move in a controlled manner through the apparatus.

10 More specifically, the present invention relates to tensioners for pipes and/or cables, in particular for laying pipes or cables offshore, and especially (but not exclusively) to such tensioners for use with so-called Integrated Service Umbilicals (ISUs).

15 Tensioners as such are known in the art and are used to grip pipes or cables as they are deployed from a ship to the sea bed during offshore installation. The tensioners maintain a constant tension in the pipe or cable (hereinafter "member") as it is deployed over the side of the vessel. Conventional tensioners consist of a number of traction devices having a track, each track comprising a number of contacting elements arranged on a continuous belt or loop. The track is driven so that as the contacting elements move with the belt or loop they move along a path or section in which contacting surfaces the contacting elements bear against the member and so control the passage of the pipe or cable through the tensioner. Typically two, three or four tracks are provided arranged equidistantly around the member. Providing a higher number of tracks (for example four rather than two) achieves a more even distribution of the loading on the member gripped by the tensioner and, for a given coefficient of friction between the tensioner and the member reduces the length over which the member has to be gripped in order to achieve a desirably low tensile force.

25 ISUs are relatively stiff but delicate "cables" which consist of a number of elements such as hoses, power cables and signal cables in a single package, generally of circular cross section. ISUs cannot withstand high clamping loads which are conventionally applied when laying pipes for example. In order to avoid such high clamping loads, ISUs require very long pipe tensioning machines (even where four tracks are provided) to provide the required grip on the ISU while providing sufficiently high hold-back tension (typically of the order of 60 tonnes) which is necessary for laying cable from a ship into very deep water.

35 Conventional traction devices are arranged so that the clamping forces on the member are reacted by the traction devices themselves, opposing traction devices being urged by hydraulic or mechanical means onto the member to provide the gripping force. The traction devices are thus required to resist both the tensile force resulting from the laying of the member and the gripping forces normal to the longitudinal axis of the member. This necessarily means that each traction device is relatively large and heavy and this problem is multiplied where higher numbers of traction devices are needed.

45 The present invention seeks to provide a tensioner in which the forces which traction devices must resist are minimised, so contributing to a reduction in the size of the

tensioner and further to provide a gripping arrangement for a tensioner which reduces the required number of traction devices.

5 According to a first aspect of the invention there is provided a tensioner for deploying an elongate member comprising:

- 10 i) an endless track including a plurality of traction elements, each traction element comprising a base unit including at least a first gripping surface and first moveable arm and a second arm each including a further gripping surface, the arms being mounted at respective sides of the traction element and the first arm being operatively moveable about a pivot axis between a first position in which the further gripping surface of said first arm is spaced from the member and a second position in which said further gripping surface of said first arm can contact the member;
- 15 ii) drive means for driving the track so that the traction elements move along an endless path, said endless path including a path segment along which said first gripping surfaces operatively contact the member;
- 20 iii) first guide means which operatively co-operates with the first arm to urge the first arm from said first position to said second position such that the first arm maintains said second position as the traction elements move along said path segment; and
- 25 iv) second guide means which operatively co-operates with said second arm to form, in said path segment, a reaction surface for a reaction force substantially normal to said surface and to the longitudinal axis of the member.

25 In a much preferred embodiment of this aspect of the invention, the second arm is also operatively moveable about a pivot axis between a first position in which the further gripping surface of said second arm is spaced from the member and a second position in which said further gripping surface of said second arm can contact the member and said second guide means operatively co-operates with the second arm to urge the second arm from said first position to said second position such that the second arm maintains said second position as the traction elements move along said path segment.

35 Preferably in said path segment, the pivot axis of the or each arm is operatively substantially aligned with the longitudinal axis of the member.

40 Where only the first arm is moveable, preferably the first guide means presents a guide surface operatively co-operating with a contacting surface of the first arm, the guide surface extending generally longitudinally with respect to the member and being so shaped in a portion preceding said path segment to move said first arm from the first position to the second position and in a portion succeeding said path section to allow the first arm to move from said second position to said first position.

45 Where both the first and second arms are moveable, preferably the guide means present respective first and second guide surfaces operatively co-operating with a contacting surface of said respective arms, the guide surfaces extending generally

longitudinally with respect to the member and being so shaped in a portion preceding said path segment to move said arms from the first position to the second position and in a portion succeeding said path section to allow the arms to move from said second position to said first position.

5

Preferably the first and second guide surfaces are defined on first and second guide rails.

10 In a preferred embodiment of this aspect of the invention the contacting surfaces of the or each arm comprises a surface of a roller mounted on the arm for rotation about an axis substantially perpendicular to the pivot axis of the first arm.

15 In another preferred embodiment of this aspect of the invention, the base unit comprises two first gripping surfaces such that when the arms are in their second position the four gripping surfaces are equidistantly spaced.

According to a second aspect of the present invention there is provided a tensioner for deploying an elongate member comprising:

- 20 i) an endless track including a plurality of traction elements, each traction element comprising:
- (a) a base unit;
 - (b) first and second arms mounted at respective opposite sides of the traction element and each including a gripping surface operatively disposed above the longitudinal axis of the member; and
 - 25 (c) third and fourth arms also mounted at respective opposite sides of the traction element and each including a gripping portion operatively disposed below the longitudinal axis of the member,
- each said arm being operatively moveable about a pivot axis between a first position in which the gripping surfaces are spaced from the member and a
- 30 ii) drive means for driving the track so that the traction elements move along an endless path, said endless path including a path segment along which said gripping surfaces operatively contact the member;
- 35 iii) guide means which operatively co-operates with the first and second arms to urge the first and second arms from said first position to said second position such that the first and second arms maintain said second position as the traction elements move along said path segment; and
- 40 iv) a first linkage connecting the first arm and the fourth arm and a second linkage connecting the second arm and the third arm such that movement of the first and second arms between their first and second positions causes a corresponding movement of the third and fourth arms between their first and second positions.

45 Preferably, in said path segment, the pivot axes of the arms are operatively substantially aligned with the longitudinal axis of the member.

In a much preferred arrangement, respectively the first and third arms and the second and fourth arms pivot about a common axis.

5 In a further preferred arrangement, the common axes of the first and third and second and fourth arms, and the longitudinal axis of the member operatively lie in the same plane.

10 In a preferred embodiment of the second aspect of the invention, the first and third arms each include an extension portion extending below their pivot axis, and the first and second linkages comprises a link arm which is pivotally attached at a first end to a lower region of the extension portion of the respective first or second arm and which is pivotally attached at a second end to a lower portion of the third or fourth arm.

15 Preferably the guide means present respective first and second guide surfaces operatively co-operating with a contacting surface of said first and second arms, the guide surfaces extending generally longitudinally with respect to the member and being so shaped in a portion preceding said path segment to move said arms from the first position to the second position and in a portion succeeding said path section to
20 allow the arms to move from said second position to said first position. The first and second surfaces are preferably defined on first and second guide rails.

25 In a preferred embodiment of this aspect of the invention the contacting surfaces of the first and second arms comprise a surface of a roller mounted on the arm for rotation about an axis substantially perpendicular to the pivot axis of the arm

30 In a much preferred arrangement of this aspect of the invention the gripping surfaces of the arms are, in use, equidistantly spaced about the circumference of the member in their second position.

35 In a preferred embodiment of the first and second aspects of the invention, the endless track comprises first and second track belts operatively driven in unison and wherein each traction element includes first and second attachment wings extending laterally from the base unit and fixedly mounted on a respective track belt.

40 For a better understanding of the invention and to show how the same may be carried into effect, reference will be made, by way of example only, to the following drawings in which:

45 Figure 1 is a perspective view of one example of a tensioner according to the invention;

Figure 2 is a more detailed view of an end portion of the tensioner of Figure 1;

Figure 3 is an end view of the tensioner of Figure 1 and 2;

Figure 4 is a plan view of a traction element of the tensioner of Figure 1;

Figure 5 is a perspective view of the traction element of Figure 4;

- 5 Figure 6 is a diagram schematically illustrating forces acting on a typical prior art tensioner;

Figure 7 is a diagram schematically illustrating the absence of corresponding forces on the tensioner according to the invention;

10

Figure 8 is an end view of a traction element of the second aspect of the invention in a gripping condition;

- 15 Figure 9 is a view similar to Figure 8 with the traction element in a released condition; and

Figure 10 is a view similar to Figure 9 of a partially disassembled traction element..

- 20 Referring now to Figures 1 to 5, the tensioner 1 is mounted in a frame 3 and comprises an endless track 5 consisting of two parallel track belts 5a and 5b which are driven by suitable drive means (not specifically illustrated). Mounted on the respective track belts 5a, 5b is a number of spaced traction elements 7. Each traction element 7 includes a pair of lateral wings 9 by means of which it is attached to a respective track belt 5a, 5b for movement with the track belt. The track 5 is mounted and driven so that the traction elements 7 describe a path in the form of an endless loop. The path includes a path segment 11 in which the path is essentially straight and aligned with the longitudinal axis 13 of the member (pipe or cable or ISU etc) 15.

- 30 Each traction element 7 is essentially similar and consists of a base unit 17 on which are mounted pads or cushions 19 which define gripping surfaces 21 which contact the member in use. The two lateral wings 9 depend from the respective sides of the base unit 17 and may be formed integrally therewith. At either side of the base unit 17 are mounted arms 23a and 23b. On each arm is mounted a pad or cushion 25 which is generally similar to the pads or cushions 19 and which defines a further gripping surface 27a, 27b. The arms 23 are mounted on the base unit so that they can rotate with respect to the base unit 17 about axes 29a and 29b. The axes 29a and 29b are parallel to the longitudinal axis of the member 15 when the member is retained in the tensioner 1. The rotation of the arms 23a, 23b about the axes 29a, 29b allows the arms 23a, 23b to move between a clamping position in which the member 15 is gripped by the further gripping surfaces 27a, 27b (in combination with the gripping surfaces 21 of the base unit 17) and a release position in which the further gripping surfaces 27a, 27b are spaced from the member. Figures 4 and 5 specifically illustrate the clamping and release positions of arms 23a and 23b. In these Figures, the arm 23a is shown in the clamping position and the arm 23b is shown in the release position. (NB: the positions of the arms as shown are for the purposes of illustration
- 45

mounted on the base unit for movement about pivot axes 129a, 129b. The first and second arms 123a, 123b are essentially similar to one another and the third and fourth arms 123b, 123d are essentially similar to one another. The first and third arms 123a, 123c are mounted on one side of the base unit 117 and the second and fourth arms 123b, 123d are mounted on a second, opposite, side of the base unit 117. The first and third arms 123a, 123c pivot about a first pivot axis 129a and the second and fourth arms 123b, 123d pivot about a second pivot axis 129b.

Each of the four arms 123a, 123b, 123c and 123d is provided with a pad or cushion 125 which defines a gripping surface 127 for the member 15. The pad or cushion 125 of the first and second arms 123a, 123b is disposed on an upper part 122a, 122b of the arm, above the longitudinal axis 13 of the member 15. The third and fourth arms 123c, 123d extend in use principally below the longitudinal axis 13 so that the pads or cushions of these arms are disposed below the longitudinal axis 13.

The first and second arms 123a, 123b comprise a roller 137 which co-operates with guide rails in an analogous manner to the first aspect of the invention to move the first and second arms 123a, 123b from a first (released) condition (Figure 9) to a second (gripping) condition (Figure 10). As can best be seen from Figure 10 (which shows the second and third arms only), the second arm 123b includes a lower portion 124b which extends below the pivot axis 129b. First arm 123a includes a corresponding lower portion 124a extending below pivot axis 129a. A link arm 139b extends between the lower portion 124c of second arm 123b and a lower part of third arm 123c and is pivotally attached to the third and second arms 123c, 123b at its respective ends 139' and 139". A corresponding link arm 139a links first arm 123a and fourth arm 123d. The link arms provide that as the first and second arms 123a, 123b arm moved by the guide rail from the first (released) position to the second (gripping) position, the third and fourth arms 123c, 123d also move from a release position to a gripping position. In this way, members 15 of differing sizes can be accommodated by the tensioner, with the gripping surfaces 127 remaining centred about the axis 13 of the member 15. That is, relative location of the member axis 13 with respect to the track 5 is independent of the member diameter.

A particular advantage of the construction according to the present invention is that the normal gripping forces are isolated from the traction device, allowing the tensioner to be driven by a single traction device. In the prior art designs, drive means are required for each track of the tensioner. Furthermore, in the construction according to the present invention the forces that individual traction devices are required to resist. In particular, the construction according to the present invention aligns the longitudinal force on the member 15 with the line of action of the reacting force of the traction device to minimise the resultant couples applied to the traction elements. This can be seen in particular by comparison of Figures 6 and 7. In the prior art device of Figure 6, a force F_1 exerted by the member 15 is reacted by reaction force F_2 at the traction elements 7' of tracks 5' (tracks 5' are shown in part only). Thus the traction elements 7' are subject to a couple equal to $(F_2/2).d$. This couple tends to tilt or skew the contact surfaces between the traction elements and the member, so reducing the contact area. As can be seen from Figure 7, in the

construction according to the invention, the force F_p exerted by the member 15 is reacted by reaction force F_R and there is no resulting couple.

Claims

1. A tensioner for deploying an elongate member comprising:
- 5 i) an endless track including a plurality of traction elements, each traction element comprising a base unit including at least a first gripping surface and first moveable arm and a second arm each including a further gripping surface, the arms being mounted at respective sides of the traction element and the first arm being operatively moveable about a pivot axis between a first position in which the further gripping surface of said first arm is spaced from the member and a second position in which said further gripping surface of said first arm can contact the member;
- 10 ii) drive means for driving the track so that the traction elements move along an endless path, said endless path including a path segment along which said first gripping surfaces operatively contact the member;
- 15 iii) first guide means which operatively co-operates with the first arm to urge the first arm from said first position to said second position such that the first arm maintains said second position as the traction elements move along said path segment; and
- 20 iv) second guide means which operatively co-operates with said second arm to form, in said path segment, a reaction surface for a reaction force substantially normal to said surface and to the longitudinal axis of the member.
- 25 2. A tensioner as claimed in claim 1 wherein the second arm is also operatively moveable about a pivot axis between a first position in which the further gripping surface of said second arm is spaced from the member and a second position in which said further gripping surface of said second arm can contact the member and said second guide means operatively co-operates with the second arm to urge the second arm from said first position to said second position such that the
- 30 second arm maintains said second position as the traction elements move along said path segment.
- 35 3. A tensioner as claimed in claim 1 or 2 wherein in said path segment, the pivot axis of the or each arm is operatively substantially aligned with the longitudinal axis of the member.
- 40 4. A tensioner as claimed in claim 1 or claim 3 when dependent on claim 1 wherein the first guide means presents a guide surface operatively co-operating with a contacting surface of the first arm, the guide surface extending generally longitudinally with respect to the member and being so shaped in a portion preceding said path segment to move said first arm from the first position to the second position and in a portion succeeding said path section to allow the first arm to move from said second position to said first position.
- 45 5. A tensioner as claimed in claim 2 or claim 3 when dependent on claim 2 wherein the guide means present respective first and second guide surfaces operatively co-operating with a contacting surface of said respective arms, the guide surfaces

extending generally longitudinally with respect to the member and being so shaped in a portion preceding said path segment to move said arms from the first position to the second position and in a portion succeeding said path section to allow the arms to move from said second position to said first position.

5

6. A tensioner as claimed in claim 5 wherein the first and second guide surfaces are defined on first and second guide rails.

10

7. A tensioner as claimed in any of claims 4 to 6 wherein the contacting surfaces of the or each arm comprises a surface of a roller mounted on the arm for rotation about an axis substantially perpendicular to the pivot axis of the first arm.

15

8. A tensioner as claimed in any preceding claim wherein the base unit comprises two first gripping surfaces such that when the arms are in their second position the four gripping surfaces are equidistantly spaced.

20

9. A tensioner for deploying an elongate member comprising:

i) an endless track including a plurality of traction elements, each traction element comprising:

25

(a) a base unit;

(b) first and second arms mounted at respective opposite sides of the traction element and each including a gripping surface operatively disposed above the longitudinal axis of the member; and

30

(c) third and fourth arms also mounted at respective opposite sides of the traction element and each including a gripping portion operatively disposed below the longitudinal axis of the member,

35

each said arm being operatively moveable about a pivot axis between a first position in which the gripping surfaces are spaced from the member and a second position in which the gripping surfaces can contact the member;

ii) drive means for driving the track so that the traction elements move along an endless path, said endless path including a path segment along which said gripping surfaces operatively contact the member;

40

iii) guide means which operatively co-operates with the first and second arms to urge the first and second arms from said first position to said second position such that the first and second arms maintain said second position as the traction elements move along said path segment; and

45

iv) a first linkage connecting the first arm and the fourth arm and a second linkage connecting the second arm and the third arm such that movement of the first and second arms between their first and second positions causes a corresponding movement of the third and fourth arms between their first and second positions.

10. A tensioner as claimed in claim 9 wherein in said path segment, the pivot axes of the arms are operatively substantially aligned with the longitudinal axis of the member.


11. A tensioner as claimed in claim 9 or 10 wherein respectively the first and third arms and the second and fourth arms pivot about a common axis.
- 5 12. A tensioner as claimed in claim 11 wherein the common axes of the first and third and second and fourth arms, and the longitudinal axis of the member operatively lie in the same plane.
- 10 13. A tensioner as claimed in any of claims 9 to 12 wherein the first and third arms each include an extension portion extending below their pivot axis, and the first and second linkages comprises a link arm which is pivotally attached at a first end to a lower region of the extension portion of the respective first or second arm and which is pivotally attached at a second end to a lower portion of the third or fourth arm.
- 15 14. A tensioner as claimed in any of claims 9 to 13 wherein the guide means present respective first and second guide surfaces operatively co-operating with a contacting surface of said first and second arms, the guide surfaces extending generally longitudinally with respect to the member and being so shaped in a portion preceding said path segment to move said arms from the first position to the second position and in a portion succeeding said path section to allow the arms to move from said second position to said first position.
- 20 15. A tensioner as claimed in claim 14 wherein the first and second guide surfaces are defined on first and second guide rails.
- 25 16. A tensioner as claimed in any of claims 14 or 15 wherein the contacting surfaces of the first and second arms comprise a surface of a roller mounted on the arm for rotation about an axis substantially perpendicular to the pivot axis of the arm
- 30 17. A tensioner as claimed in any of claims 9 to 16 wherein the gripping surfaces of the arms are, in use, equidistantly spaced about the circumference of the member in their second position.
- 35 18. A tensioner as claimed in any preceding claim wherein the endless track comprises first and second track belts operatively driven in unison and wherein each traction element includes first and second attachment wings extending laterally from the base unit and fixedly mounted on a respective track belt.
- 40 19. A tensioner as hereinbefore described with reference to any of Figures 1 to 8.

Abstract**Longitudinal Load Varying Device for Elongate Members**

- 5 A tensioner for deploying a member such as a pipe or cable, such as a sub-sea cable deployed from a ship, comprises an endless track and drive means for driving the track. The track includes a plurality of traction elements mounted thereon for movement with the track. Each traction element includes one or more cushions for supporting the member, and a pair of opposed arms mounted on respective sides of
- 10 the base of the traction element. One or more of the arms is pivotally mounted for movement between a clamping position and a release position. In an alternative arrangement, four moveable arms are linked in diametrically opposite pairs to move between a release position and a clamping position. Cushions on the arms clamp the member in conjunction with the cushions of the traction element, when the arms are
- 15 in the clamping position. Guide means are provided to urge the arms into the clamping position to grip the member as it passes through the tensioner.

1/4

FIG. 2

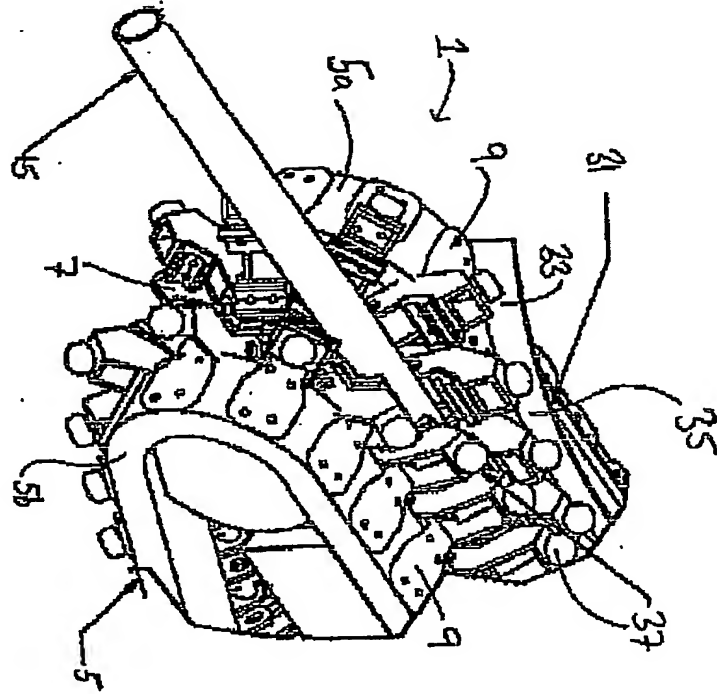

1

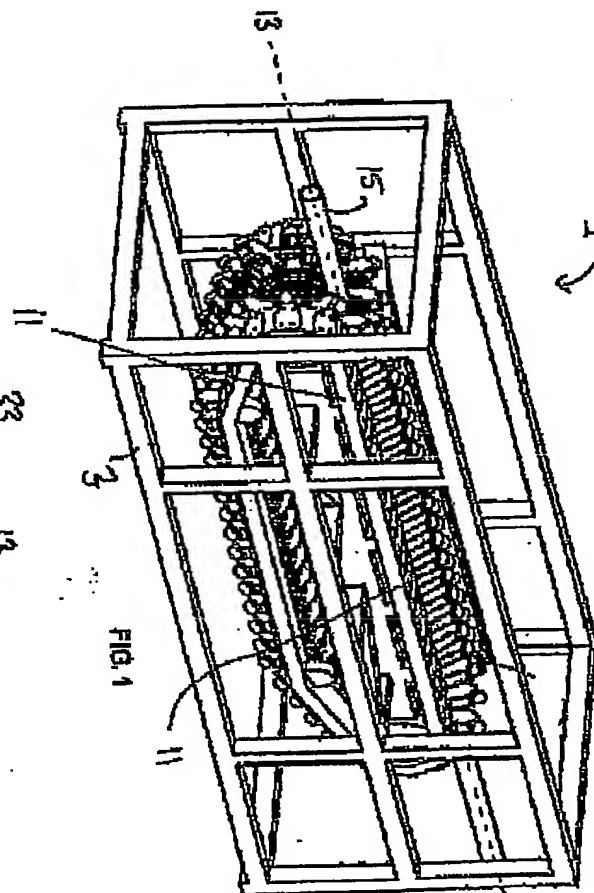


FIG. 1





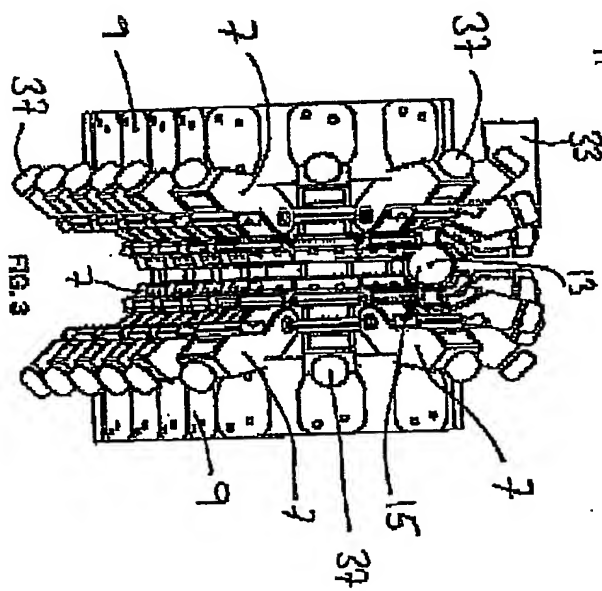





FIG. 3

2/4

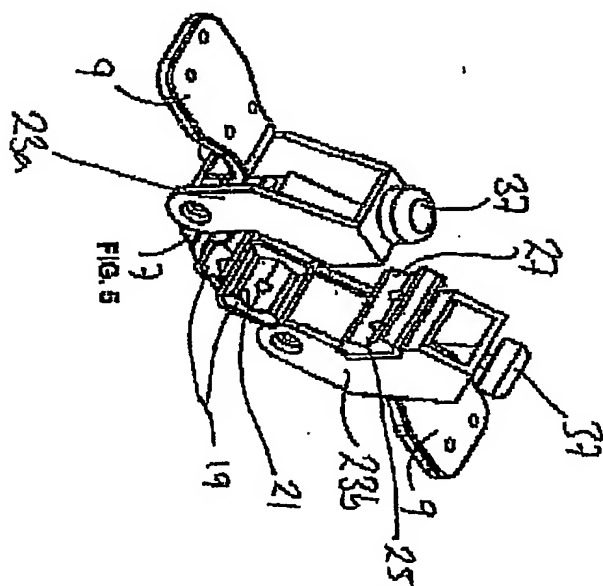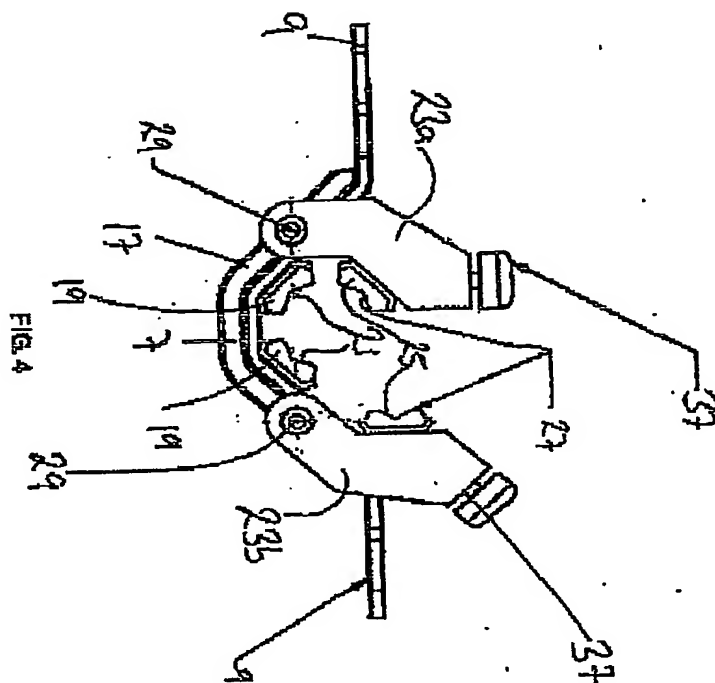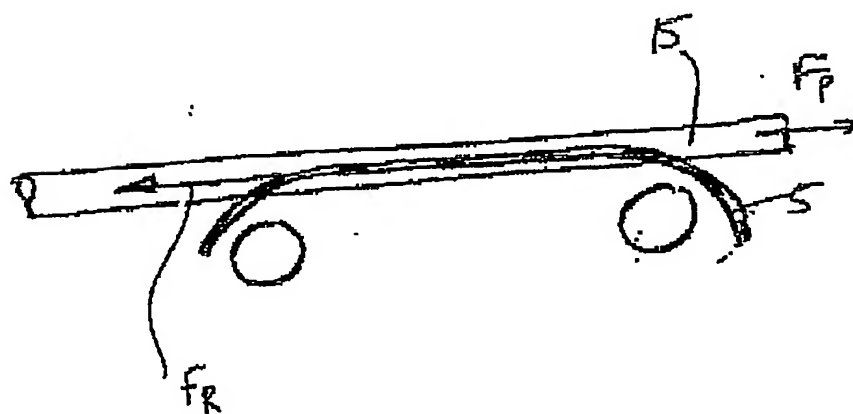

3/4

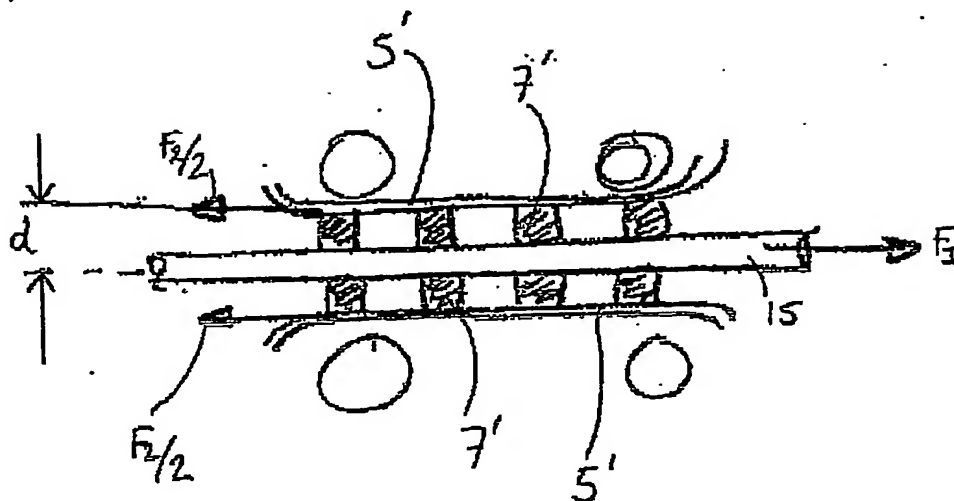

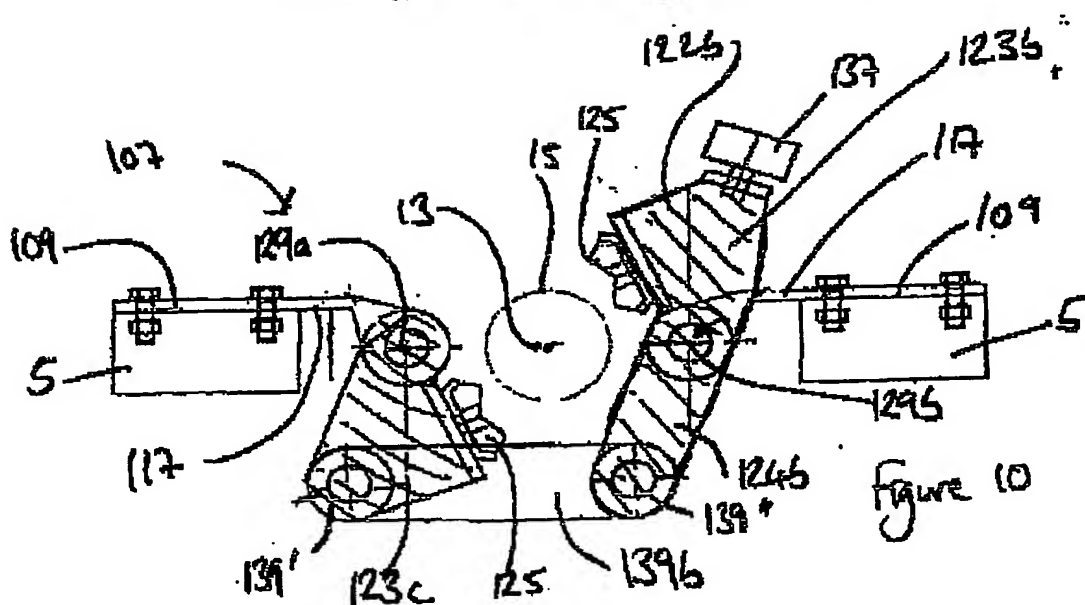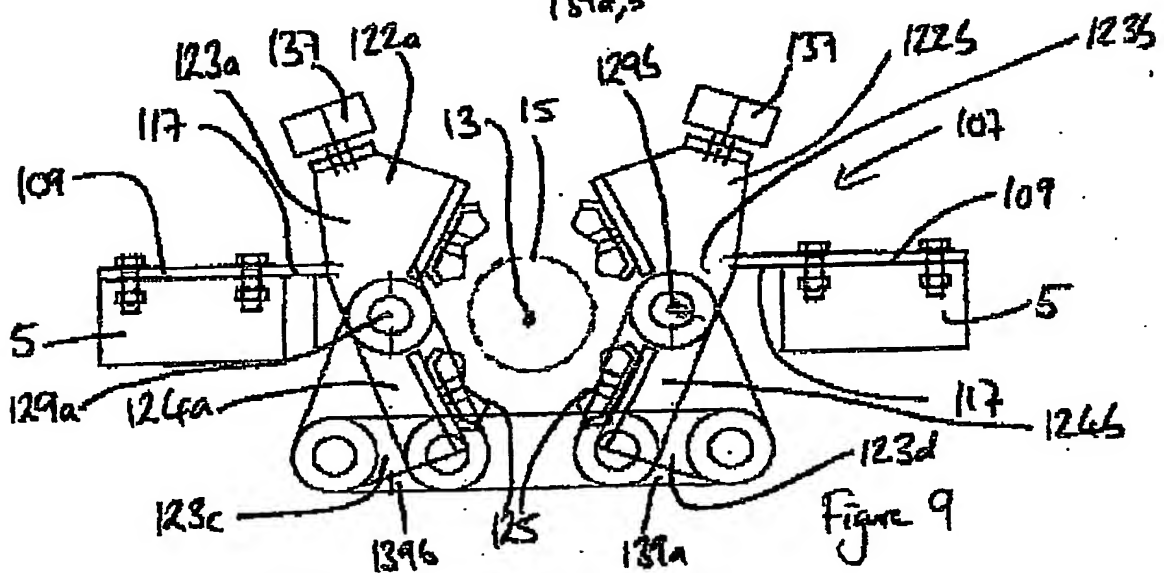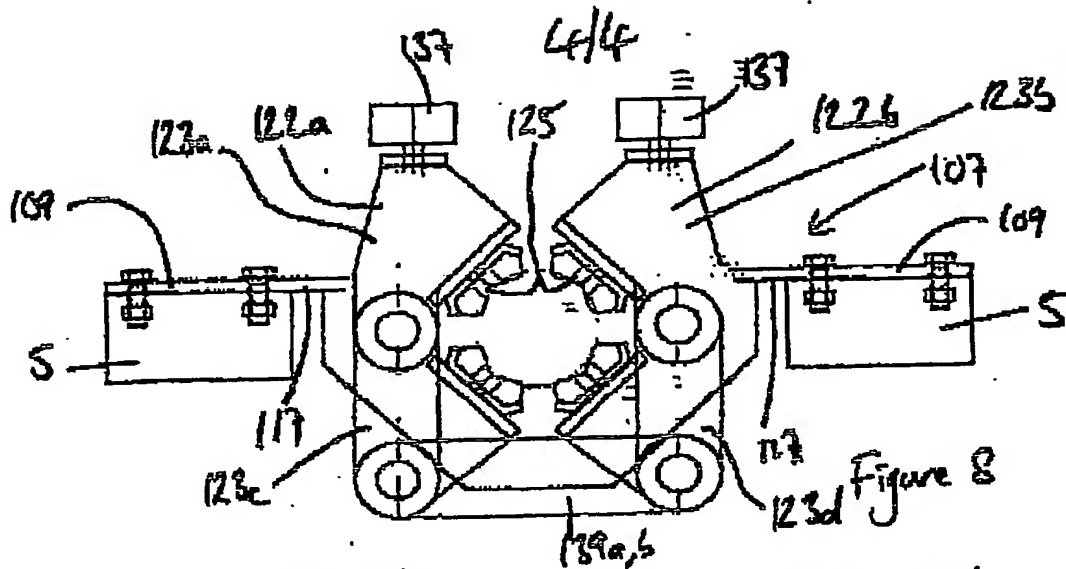

PCT Application
GB0304697



This Page Blank (uspto)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ BLACK BORDERS

☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

☐ FADED TEXT OR DRAWING

☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING

☐ SKEWED/SLANTED IMAGES

☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS

☐ GRAY SCALE DOCUMENTS

☐ LINES OR MARKS ON ORIGINAL DOCUMENT

☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.